

Active Optical Cables

40G QSFP+

Regional Availability - Global

Siemon 40G QSFP+ Active Optical Cable (AOC) assemblies offer a highly reliable and cost-effective alternative to transceiver assemblies available in lengths ranging from 0.5 m to 100 m, beyond the range of Direct Attach Copper Cables (DAC). These high performance and low power consumption AOCs are Ethernet, InfiniBand and MSA compliant with a robust construction, including a high-strength pull tab latching system which reduces plug loss ensures and more secure installations.


These 40G QSFP+ assemblies are capable of transmitting data up to 40Gb/s, offering an easy installation with a flexible, multimode fiber cable. AOCs eliminate the interoperability issues of transceiver assemblies to achieve proper parameter optimization and are equipped with Digital Diagnostic Monitoring, allowing I²C (Inter-integrated circuit) real-time supervision of operating parameters and transmits warnings if those parameters exceed specification.

Typical AOC applications include point-to-point connections within data centers, high performance computing and storage racks. The versatile connections can be rack-to-rack within the same row or another row, and their hot swappable and high-density design allows use within a wide range of top-of-rack and other data center architectures.



Standards Compliance

- QSFP+ MSA
- IEEE P802.3bm
- 40GBASE-SR4
- RoHS/REACH compliant
- CML Compatible Electrical I/O
- Infiniband
- TUV/UL certified

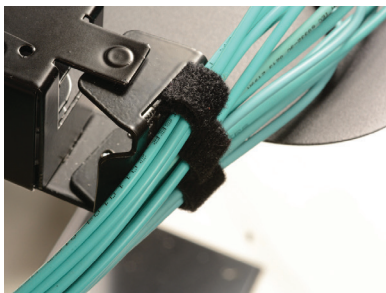

Small Diameter Bundles

AOC's thin diameter allow for smaller bundles which promotes better airflow.

Part Number (OFNP)	Part Number (LSZH/OFNR)	Length
Q1Q10F-Y00.5B13	Q1Q10F-V00.5B13	0.5m (1.64 ft.)
Q1Q10F-Y01.0B13	Q1Q10F-V01.0B13	1.0m (3.28 ft.)
Q1Q10F-Y01.5B13	Q1Q10F-V01.5B13	1.5m (4.92 ft.)
Q1Q10F-Y02.0B13	Q1Q10F-V02.0B13	2.0m (6.56 ft.)
Q1Q10F-Y03.0B13	Q1Q10F-V03.0B13	3.0m (9.87 ft.)
Q1Q10F-Y05.0B13	Q1Q10F-V05.0B13	5.0m (16.40 ft.)
Q1Q10F-Y07.0B13	Q1Q10F-V07.0B13	7.0m (22.97 ft.)
Q1Q10F-Y10.0B13	Q1Q10F-V10.0B13	10m (32.80 ft.)
Q1Q10F-Y15.0B13	Q1Q10F-V15.0B13	15m (49.21 ft.)
Q1Q10F-Y20.0B13	Q1Q10F-V20.0B13	20m (65.62 ft.)
Q1Q10F-Y25.0B13	Q1Q10F-V25.0B13	25m (82.02 ft.)
Q1Q10F-Y30.0B13	Q1Q10F-V30.0B13	30m (98.43 ft.)
Q1Q10F-Y40.0B13	Q1Q10F-V40.0B13	40m (131.23 ft.)
Q1Q10F-Y50.0B13	Q1Q10F-V50.0B13	50m (164.04 ft.)
Q1Q10F-Y0100B13	Q1Q10F-V0100B13	100m (328.08 ft.)

Product Information

Absolute Maximum Ratings	Min	Max
Module Supply Voltage	0.0V	4.0V
Storage Temperature	-40°C (-40°F)	85°C
Relative Humidity - Storage	0%	85%
Relative Humidity - Operating	0%	85%


Mechanical Specifications	
Minimum Bend Radius	20 × OD mm (without tension) 10 × OD mm (with max tension)
Cable Diameter (OD)	3.0mm ±0.20
Fiber Type	OM3 multimode

Electrical Specifications	
Module Supply Voltage	3.13V to 3.47V (3.3V typical)
Case Operating Temperature	0°C (32°F) to 70°C (158°F) 25°C (77°F) (typical)
Single Module Supply Current	150mA typical
Maximum Power Consumption Per End	0.5W (max)

Channel Parameters	
Channels	4 Lanes, bi-directional
Data Rate per Channel	10.3125 Gb/s (max)
Operating Wavelength	850nm

Receiver Electrical Interface	
Rx Data Differential Output Voltage	200mV to 1000mV
Rx Data Differential Output Impedance	100Ω (typical)

Transmitter Electrical Interface	
Tx Data Differential Input Voltage	200mV to 1600mV
Tx Data Differential Input Impedance	100Ω (typical)

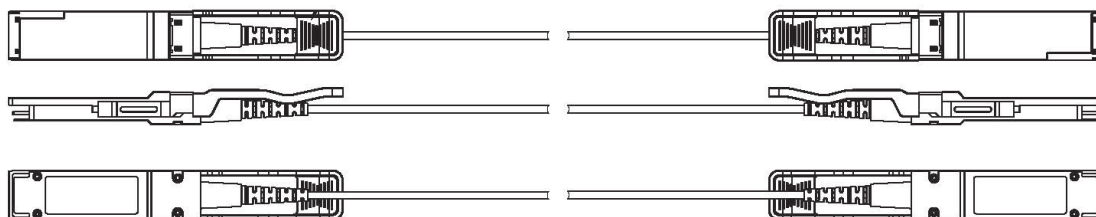

North America
P: (1) 860 945 4200

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America
P: (1) 860 945 4200

Mexico
P: (521) 556 387 7708/09/10

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

Asia Pacific
P: (61) 2 8977 7500

Siemon OEM Technologies
P: (1) 860 945 4213
www.siemon.com/OEM

China
P: (86) 215385 0303

India, Middle East & Africa
P: (971) 4 3689743

SCAN TO DOWNLOAD
SPEC SHEET

WWW.SIEMON.COM

200_07007_SS_HSL_AOCQSP+40G_Global_RevG 01/25

